

# DOCKCONTROLLER DC-200

Body-worn camera dock aggregation and management device.

Simultaneously manage up to 84 body-worn cameras while also assigning them to operators on VideoManager, using the DockController DC-200.



## GENERAL INFORMATION

Product Code	DC-200/US
Typical Usage	Connected to VideoManager over Ethernet, with multiple docks attached via USB.
Management Software	VideoManager 11 onwards.
Warranty	1 year return to manufacturer warranty.

## SIZE AND WEIGHT

Dimensions	6.1 x 5.3 x 1.5 in (154 x 136 x 37 mm)
Weight	23.3 oz (660 g)

## SCALABILITY


Body-Worn Camera Support	Connect up to 84 body-worn cameras to one DC-200. Ideal for use with 7- and 14-port docks. Can also be used with up to 4 individual 1-port docks.
Unlimited VideoManager Connectivity	There is no limit on the number of DC-200s that can be connected to an instance of VideoManager.

## TECHNICAL SPECIFICATIONS

Operating Temperature	32 to 104 °F (0 to 40 °C)
Storage Temperature	-67 to +158 °F (-55 to +70 °C)
Input Voltage (to supplied external power supply)	100 - 240V, 47 - 63Hz
Maximum Power Consumption	20W

## CONNECTIVITY

High-Speed Footage Downloads	Gigabit Ethernet Port (1000/100/10 mbps) for rapid footage download and body-worn camera assignment.
RFID-Compatible	Attach an RFID reader to one of the DC-200's USB ports to enable quick body-worn camera assignment. Operators can use their ID or access cards with the RFID reader to assign themselves a suitably configured device and immediately begin recording.
Bandwidth Restrictions	Apply bandwidth rules to individual DC-200s to control how much footage is uploaded to VideoManager, and when.
High-Priority Configuration	Prioritize certain DC-200s to ensure that their footage is downloaded to VideoManager first.
Slow Connection Configuration	DC-200s with this setting enabled will continuously try to offload footage to VideoManager, ignoring the bandwidth limit.
Shared Bandwidth Groups	Add multiple DC-200s to one bandwidth group to ensure that the bandwidth limit is shared equally between them. Use this where two or more DockControllers are sharing one wide-area network connection to VideoManager.

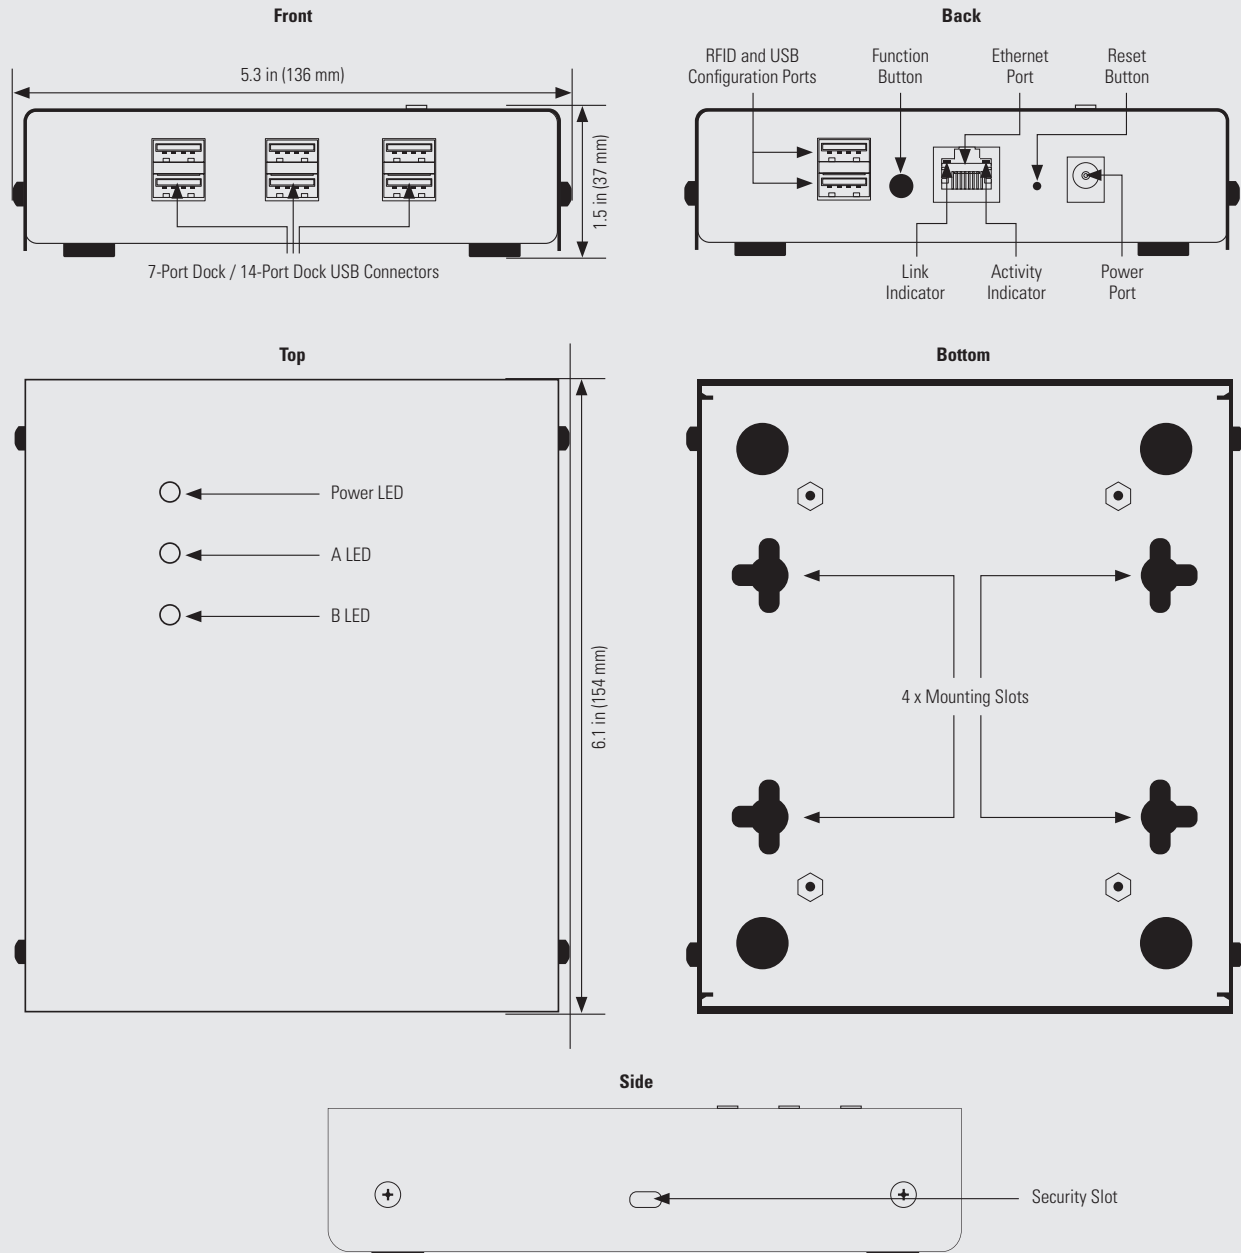

For more information, please visit: [www.motorolasolutions.com](http://www.motorolasolutions.com)

Motorola Solutions Inc., 500 W Monroe St, Chicago, IL 60661. U.S.A

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.  
 © 2020 Motorola Solutions, Inc. All rights reserved. (07/20) (ED-002-007-05-US)